

SUPAFLEX

PRODUCT

CATALOG

www.supaflex.co.in

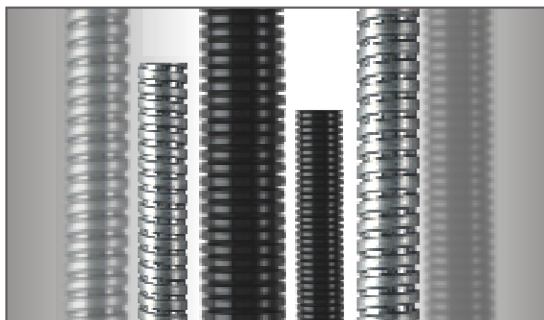


Industrial PRODUCTS LINE

- | SPIRAL CONDUITS & FITTINGS | CABLE GLANDS & ACCESSORIES | PANEL FANS
- | PVC WIRING DUCTS | DIN MOUNTING RAILS | CABLE TIES | LUGS | DRAG CHAIN
- | HEAVY DUTY CONNECTORS | PILOT LIGHT & PUSH BUTTONS | INDUSTRIAL SWITCHES

A trusted **BRAND** for industrial needs

TÜV CE  **RoHS**

SPIRAL CONDUITS & FITTINGS SYSTEMS**Features**

- Metallic & Non-metallic
- Galvanised steel
- GI with PVC coating
- Liquid tight
- Polyamide PA6 V2
- PE & Slit version also available
- Halogen free
- UV resistant
- Self extinguishing
- Temperature range: -40 to +120°C

CE RoHS

NYLON CABLE GLANDS & ACCESSORIES**Features**

- Metric & PG cable glands
- Nickel plated brass
- Temperature range : -40°C to +100°C
- PA6 Nylon cable glands
- IP 68 - 5 bar
- VDE, TUV, UL certified

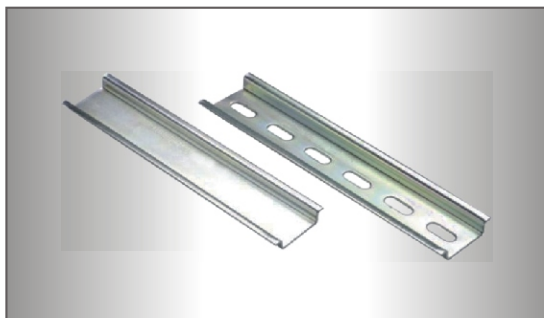
ORTAC®

UL CE RoHS

PVC WIRING DUCTS, TOOLS & ACCESSORIES**Features**

- Available in Narrow Slot & Wide Slot
- Un-slotted design also available on request
- Standard length 1 meter & 2 meter
- Available in grey color (RAL 7042)
- Other colors also available on request

CE RoHS

DIN MOUNTING RAILS**Features**

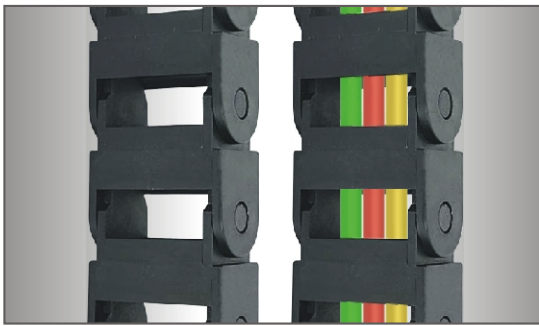
- Available in Perforated & Un-perforated series
- Designed in accordance to EN 60715
- Zinc passivation according to DIN EN 12329
- Cold rolled steel

CE RoHS

PANEL FANS COOLING SOLUTIONS**Features**

- Aluminium die cast body
- Metal & Plastic blades
- Sleeve bearing
- Ball bearing
- Also available in plastic body
- Flame retardant
- Voltage - 220V AC, 110V AC, 24V DC

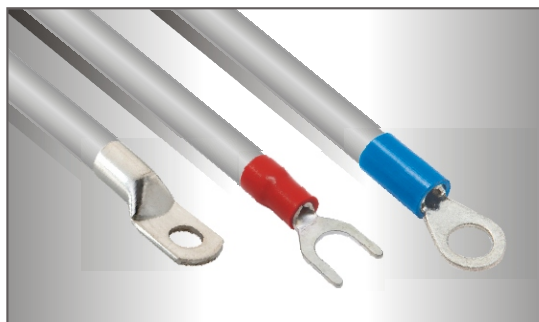
CE RoHS

DRAG CHAINS**Features**

- Glass fibre reinforced
- Polyamide UL94-HB
- Both side open
- Both side enclosed
- One side enclosed
- Speed :10 m/sec
- Temperature range: -30°C to +130°C
- Noise : 40 DB (DIN EN 61672-1)

NEW
Product Launch **ORTAC**

TÜV CE RoHS

CABLE LUGS & CORD END TERMINALS**Features**

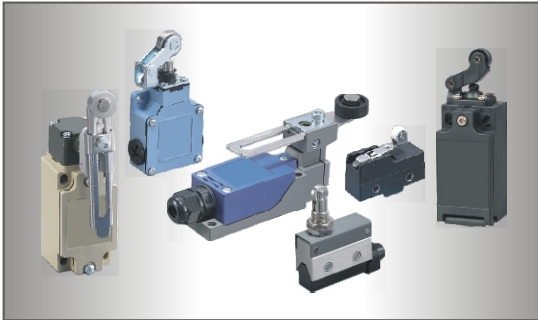
- Cord end terminals E type, Twin type, Fork type, Ring type, PIN type, male & female terminals
- Insulated & Non-insulated
- Material - Copper & Nylon

CE RoHS

NYLON CABLE TIES**Features**

- Material - PA6.6
- Fire retardant
- Self locking
- Temperature range: -35°C - +110°C
- CE, RoHS, UV resistance
- Colors available - White & Black
- Other colors are also available on request

CE RoHS

INDUSTRIAL SWITCHES**Features**

- Double circuit type of limit switch
- Small size, water-proof & oil-proof construction
- High mechanical strength, consist of intensive plastic & aluminium cast
- Built in contact box has double spring & long mechanical life
- Smooth operation with larger over travel distance
- Various actuators for different application

**HEAVY DUTY CONNECTORS****Features**

- Metal & thermoplastic enclosures
- Various specifications for power, signal and data
- Modular design
- High current solution

**PILOT LIGHTS & PUSH BUTTONS SERIES****Features**


- Push Buttons & Indicating Lights**
- Metallic & Non-metallic Mushroom type, Flush type, Momentary selector switches, Push pull type, Illuminated type
 - Temperature range: -25°C to +70°C
 - Self wiping, slow break NO NC
 - IP 65



- Pilot Lights**
- SMD LED
 - ABS Body



Download Catalog Here



Follow us on



Contact Us

SUPA FLEX PVT. LTD.**Address**

Plot No. 8/33, III Floor, R.H.S. Complex,
Industrial Area Kirti Nagar, New Delhi 110015 INDIA

Telephone

+91-11-68888708

Mobile

+91-95999992308 | +91-9599992306-10

E-mail

sales@supaflex.co.in | sales1@supaflex.co.in